

## Single Point Stainless Steel Load Cell



### FEATURES

- Capacity range: 10 to 150kg
- Stainless steel construction
- Single point 400 x 400mm platform
- Sealed to IP66
- Compact size: only 40mm high
- OIML approved to C3 (20 - 100kg)
- Choice of mounting threads: 1/4-20 UNC or M6 x 12

### OPTIONAL FEATURES

- EEx ia IIC T4 - ATEX hazardous area approval
- Grounded version includes shield wire in load cell cable

### DESCRIPTION

Model 1142 is a stainless steel single point load cell suitable for direct mounting with platform, bench, counting, and a wide range of other scale applications. Small physical size, combined with high accuracy and low cost, makes 1142 load cells the perfect choice for new or retrofit scale construction.

A humidity-resistant protective coating assures stable operation in damp environments over the entire compensated range and conforms to IP66 (IEC 60529).

Also available is an ATEX 2G EEx ia IIC T4 approved version for hazardous areas.


The six-wire cable includes two sense wires that compensate for changes in lead resistance due to temperature changes and cable extension.

Model 1142 options offer a choice of boltthreads, 1/4-20 UNC or M6 x 12, and a grounded version that includes a "shield" wire in the load cell cable.

### APPLICATIONS

- Platform scales
- Bench scales
- Counting scales
- Grocery scales

### OUTLINE DIMENSIONS in millimeters

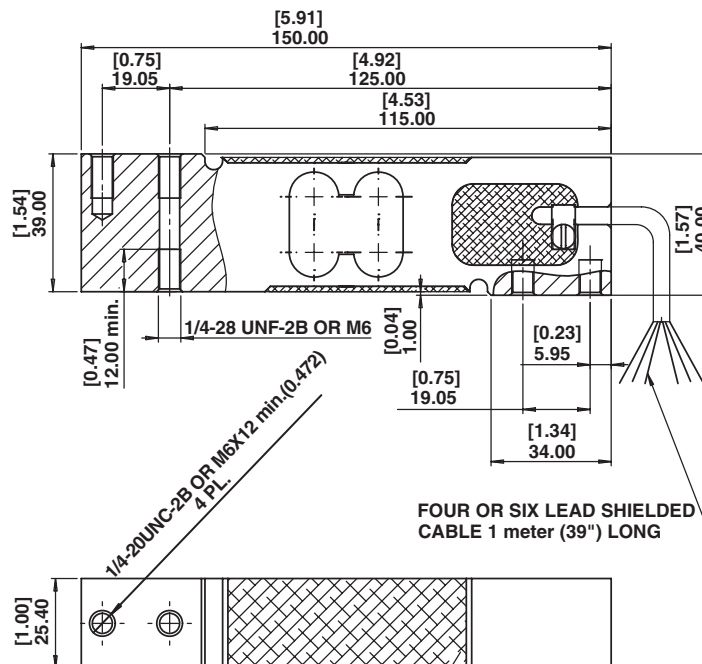

All DIMENSIONS IN mm [inches].




**SPECIFICATIONS**

PARAMETER	VALUE		UNIT
Rated capacity-R.C. ( $E_{max}$ )	10, 15, 20, 30, 50, 75, 100, 150**		kg
OIML Accuracy class	Non-Approved	C3*	
Maximum no. of intervals (n)	1000	3000	
$Y = E_{max}/V_{min}$	4000	15000	Maximum available
Rated output-R.O.	2.0		mV/V
Rated output tolerance	0.2		±mV/V
Zero balance	0.2		+mV/V
Zero Return, 30 min.	0.0500	0.0167	±% of applied load
Total Error	0.0300	0.0200	±% of rated output
Temperature effect on zero	0.0070	0.0023	±% of rated output/°C
Temperature effect on output	0.0030	0.0010	±% of applied load/°C
Eccentric loading error	0.0074	0.0049	±% of rated load/cm
Temperature range, compensated	-10 to +40		°C
Temperature range, safe	-20 to +70		°C
Maximum safe central overload	150		% of R.C.
Ultimate central overload	300		% of R.C.
Excitation, recommended	10		Vdc or Vac rms
Excitation, maximum	15		Vdc or Vac rms
Input impedance	385±10		Ohms
Output impedance	351±5		Ohms
Insulation resistance	>2000		Mega-Ohms
Cable length	1		m
Cable type	6 wire, PVC, single floating screen		Standard
Construction	Stainless steel		
Environmental protection	IP66		
Platform size (max)	400 x 400		mm
Recommended torque	Up to 30kg: 7.0 50kg & up: 10.0		N*m

\* 50% utilization

\*\* 10, 15 & 150 are not approved

**Wiring Schematic Diagram**  
(Balanced bridge temperature compensation)



**VISHAY TRANSDUCERS (VT) SALES OFFICES**

**VT Americas**  
City of Industry, CA  
PH: +1-626-858-8899  
FAX: +1-626-332-3418  
vt.us@vishaymg.com

**VT Netherlands**  
Breda  
PH: +31-76-548-0700  
FAX: +31-76-541-2854  
vt.nl@vishaymg.com

**VMG UK**  
Basingstoke  
PH: +44-125-646-2131  
FAX: +44-125-647-1441  
vt.uk@vishaymg.com

**VMG Israel**  
Netanya  
PH: +972-9-863-8888  
FAX: +972-9-863-8800  
vt.il@vishaymg.com

**VMG Germany**  
Heilbronn  
PH: +49-7131-3901-260  
FAX: +49-7131-3901-2666  
vt.de@vishaymg.com

**VT China**  
Tianjin  
PH: +86-22-2835-3503  
FAX: +86-22-2835-7261  
vt.prc@vishaymg.com

**VMG France**  
Chartres  
PH: +33-2-37-33-31-20  
FAX: +33-2-37-33-31-29  
vt.fr@vishaymg.com

**VT Taiwan\***  
Taipei  
PH: +886-2-2696-0168  
FAX: +886-2-2696-4965  
vt.roc@vishaymg.com  
\*Asia except China



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.