


SW1010

Scales & Weighing Solution LLC

Aluminum

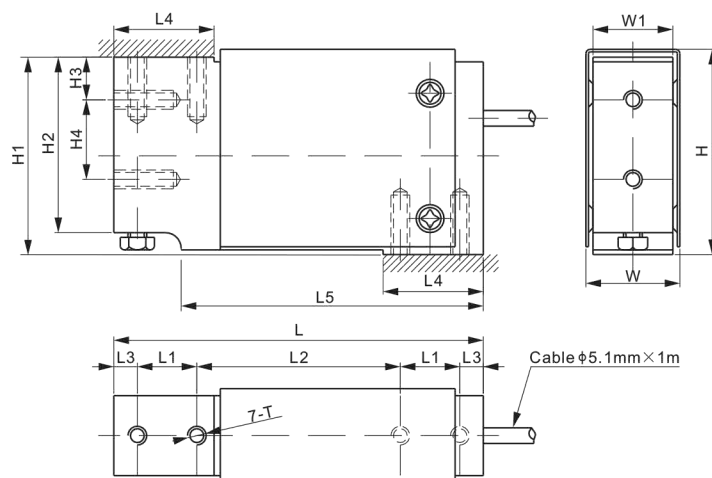

CE RoHS

DIMENSIONS

RATED CAPACITY	H	H1	H2	H3	H4	L	L1	L2	L3	L4	L5	W	W1	T
kg/mm														
10~100	65.5	63.0	56.0	13.6	25.4	118.0	19.1	65.0	7.5	32.0	96.5	30.0	25.5	M6X1 Depth19
lb/inches (conversion of above dimensions)														
22~220.5	2.58	2.48	2.21	0.54	1.00	4.65	0.75	2.56	0.30	1.26	3.80	1.18	1.00	M6X1 Depth0.75

SPECIFICATIONS

Full Scale Output	2.0 mV/V $\pm$ 10%	Recommended Excitation	10V (15V Maximum)
Zero Balance	$\pm$ 0.02 mV/V	Reference Max. Platform Size	400 $\times$ 400 mm
Non-linearity	$< \pm 0.017\%$	Insulation Resistance	$> 2 [50V DC] G\Omega$
Repeatability	$< \pm 0.017\%$	Nominal Temperature Range	-10°C to 40°C / 14°F to 104°F
Hysteresis Error	$< \pm 0.017\%$	Safe Overload	150% of full scale
Creep in 30 min.	$< \pm 0.023\%$	Breaking Overload	300% of full scale
Input Resistance	415 $\Omega \pm 15$	Seal Type / IP Rating	Environmentally Sealed / IP66
Output Resistance	350 $\Omega \pm 3$	Cable Color Code	Stated on Calibration Certificate
Element Material	Aluminum		Shield Bare

Scales & Weighing Solution LLC
115 Parker ave
Hawthorne, NJ 07506
<https://theloadcelldepot.com>

Warehouse:
330 Braen Ave
Wyckoff, N.J. 07481

