




Model	I10-TMS3040H
Weight range (max)	15 kg 30 kg 60 kg
Division	2 g 5 g 10 g
Optional Division	1 g 1 g 2 g
Internal resolution	16.000.000
Pre-warm time	1 hour
Stabilization time	Less than 2 seconds
Calibration weight to select	To select
Weight units	g , kg , lb , oz.
Interface	RS-232C
Air humidity	Max.90%
Structure material	High resistance epoxy painted steel
Pan material	Stainless steel
Platform size (mm)	300 * 400
Indicator size (mm)	220 * 110 * 55
Overall dimensions (mm)	300 * 400 * 415

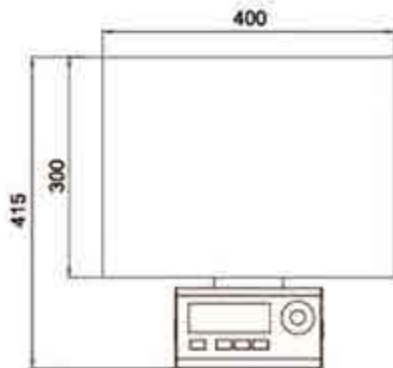

- 1.OIML R76 Class III at single range and multi range operations
- 2.Wide angle 26mm LCD weight display with bright back light
- 3.Programmable 2 function keys for easy and fast usage
- 4.100 part counting memory for fast counting in high accuracy
- 5.100 classifying memory with visual and acoustic annunciator
- 6.Animal weighing in high accuracy
- 7.Unit conversion between metric and imperial units
- 8.Serial data output through printer, remote display or PC connection
- 9.Optional second serial interface
10. Mobile usage with internal rechargeable Li-ion battery